




# RYX

Rong Yixin

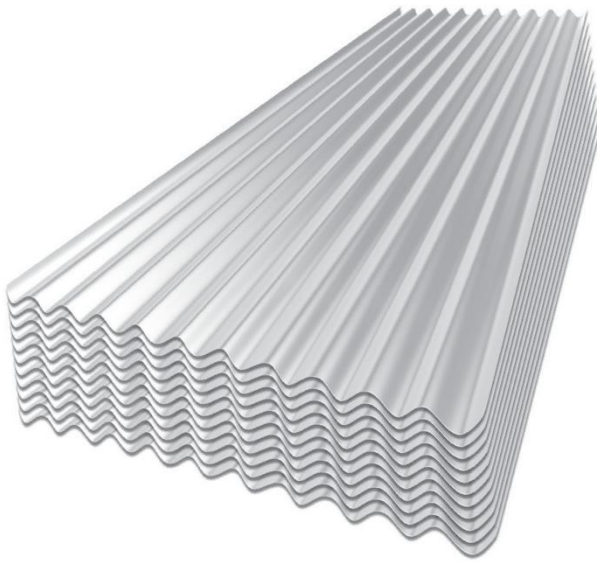

## **CORRUGATED SHEET CALIBRE 26 -RYX-**

### **Features TECHNICAL SHEET.**


- 1.Base material: steel (iron and carbon alloy) ASTM A1008/A1008M: Standard Specification for Steel Sheet, Cold Rolled, Carbon, Low Alloy High Strength and No High Strength Interstitial, meets COGUANOR NTG 36012, NTG 36013 standard
- 2.Zinc plated on both sides by hot dip galvanizing process, according to ASTM A653/A653M standard
- 3.Calibre 26 of legitimate quality.
- 4.Sheet length: 12 feet.
- 5.Total width 0.80 m. / Useful width 0.70 m.
- 6.All our products come identified with our RYX brand and caliber of the same.



# RYX

Rong Yixin

**STEEL BEAM  
TYPE C  
4 In X 2 In  
-RYX-**

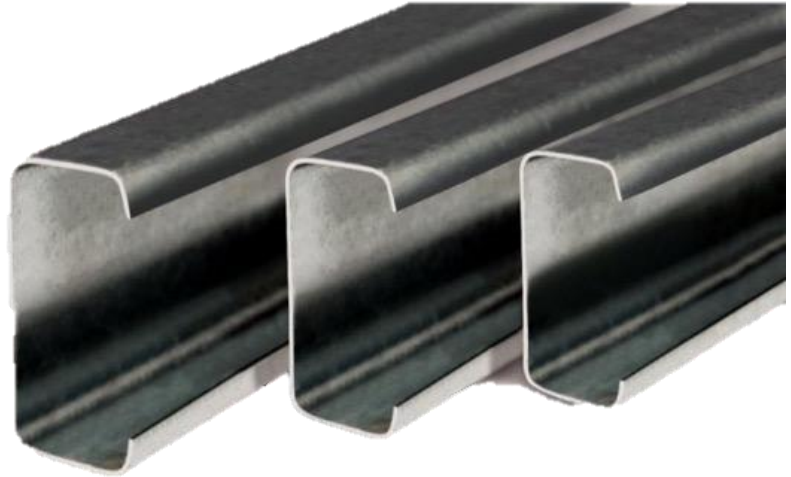

**Features  
TECHNICAL SHEET.**

- 1.Frequency: 4 inches.
- 2.Base: 2 inches.
- 3.Thickness: 1.1mm
- 4.Length: 20 feet.
- 5.Base Material: Galvanized Iron (iron and carbon alloy) ASTM A1008/A1008M: Standard Specification for Iron Coaster, Cold Laminated, Carbon, Low Alloy High Strength and No High Strength Interstitial, Meets COGUANOR NTG 36012, NTG 36013
- 6.Zinc plated on both sides by hot dip galvanizing process, according to ASTM A653/A653M standard
- 7.All our products come identified with our RYX brand and caliber of the same.
- 8.Guaranteed by our distributors and manufacturer



# RYX

Rong Yixin

**PULSE SCREW  
1/4 X 3  
INCHES WITH  
WASHER  
-RYX-**



**Features  
TECHNICAL SHEET.**

- 1.Trade name: 1/4" x 3" Galvanized Wrist Screw
- 2.Recommended use: Fixing of metal sheets (roofs, facades, light structures) in civil and industrial buildings.
- 3.Type: Self-punching/self-screwing screw for sheet
- 4.Nominal diameter: 1/4 inch. (0.25")
- 5.Total length: 3 inches. (3.00")
- 6.Thread: Partial/incomplete (from tip to approx. 2 3/4") — designed to capture sheet and underlying wood/structure
- 7.Tip: Drill tip, hardened thread for drilling and sheet metal threading
- 8.Head: Hexagonal head with integrated washer
- 9.Washer: Metal washer with zinc plated EPDM seal
- 10.Finish: Hot Dip Galvanized (HDG)
- 11.Material: 4.8 grade carbon iron
- 12.Tip hardness HRC 40 – 45